
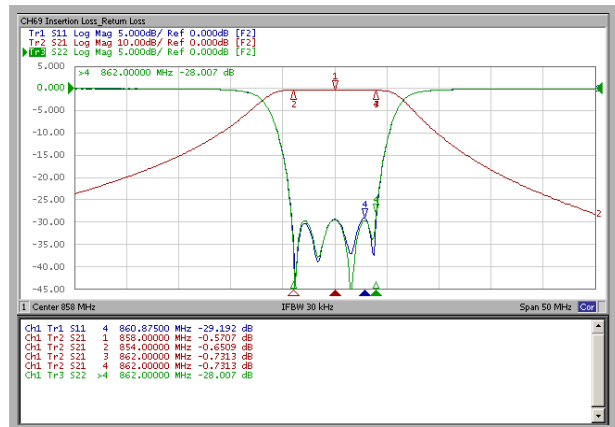


DVB-T(Digital Video Broadcasting - Terrestrial) BPF

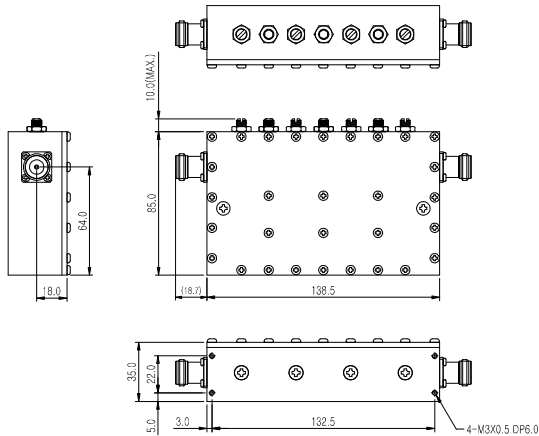

Item		Specifications
Frequency Range		470 ~ 862MHz
Insertion Loss (Max.)	Fc	0.9dB
	Fc ± 4MHz	1.4dB
Ripple (Max.)		0.8dB
Return Loss (Min.)		25dB
Attenuation (Min.)	Fc ± 12MHz	20dB
Group Delay (Max.)		300ns
Power Rating (Ave.)		50W
In/Out Port		N – Female
Temperature Range		-10 ~ +50
Size (W x D x H) (mm)		138.5 x 95.0 x 35.0
Weight (Max.)		1Kg